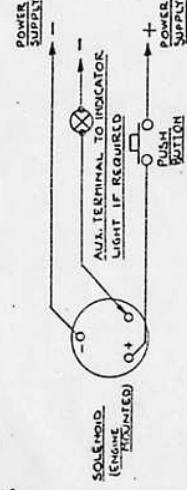
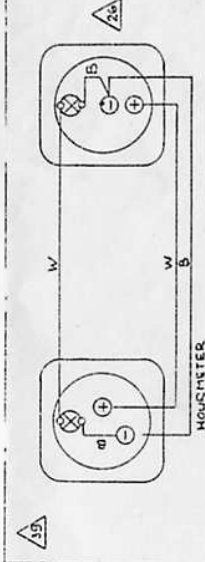
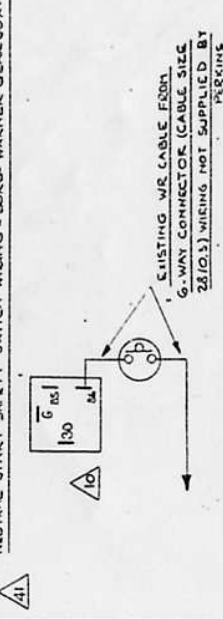
SOLENOID WIRING WITH RELAY FOR LONG RUNS
WIRING NOT SUPPLIED BY PERKINS

CABLE SIZE	MAX. TOTAL LENGTH	MIN. C.A.
48/0.3	4.2	6.2
65/0.3	6.2	6.2

SOLENOID WIRING
WIRING NOT SUPPLIED BY PERKINSHOURMETER WIRING WITH BULB.
WIRING NOT SUPPLIED BY PERKINS

NEUTRAL START SWITCH WIRING - BORG-WARNER GEAR BOX.

COLOUR INDEX	COLOUR INDEX
B BLACK	B BLACK
N BROWN	N BROWN
R RED	R RED
Y YELLOW	Y YELLOW
G GREEN	G GREEN
LG LIGHT GREEN	LG LIGHT GREEN
U BLUE	U BLUE
P PURPLE	P PURPLE
W WHITE	W WHITE
O ORANGE	O ORANGE

RESISTANCE OF BATTERY CABLES II AND III NOT TO EXCEED .0017 OHM (NOT SUPPLIED)

MAXIMUM TOTAL LENGTH METRES	MAXIMUM TOTAL LENGTH FEET	MIN. C.A.	PER METRE	PER FOOT	APPROXIMATE EQUIVALENT SIZE
2.2	7.33	21.24	0.00072	0.000233	ENGLISH B.15 SAE
3.7	12.0	31.8	0.00046	0.0001408	AMERICAN B.15 SAE
5.8	19.0	51.175	0.00029	0.000089	1
9.0	29.5	81.23	0.00019	0.000059	00
		121	0.00019	0.000059	000

EDR
TD