

Kerick 3/ 8” Tank Mount Float Valves



Description

These heavy-duty, non-corrosive, PVC float valves are available with .187”, .25”, and .312” orifice sizes to match required flow ranges and are tank (bulkhead) mount with a 3/8” pipe thread inlet and outlet. For use with 3” or 6” rods and 4”x 5” or 2”x 2”x 4” floats.

Construction: NSF-approved PVC, 18-8 stainless steel hardware

Seal: Santoprene rubber


Purchase Online:

Amazon	U.S. Plastics Corp.
Grainger	TheValveShop.com

Specifications

Part Number	Pipe Size (in)		Orifice Size (in)	Free Discharge Flow Capacity	
	Inlet	Outlet		20 PSI	60 PSI
PT3838187	3/8 NPT Tank	3/8 NPT	0.187	4.4 GPM	7.2 GPM
PT383825	3/8 NPT Tank	3/8 NPT	0.25	7.7 GPM	12.5 GPM
PT3838312	3/8 NPT Tank	3/8 NPT	0.312	8 GPM	15 GPM

Trouble-Free Operation for Float Valve Selection and Installation	Float Valve Installation
Warranty	Manufacturers(OEM) & Wholesale Distributors

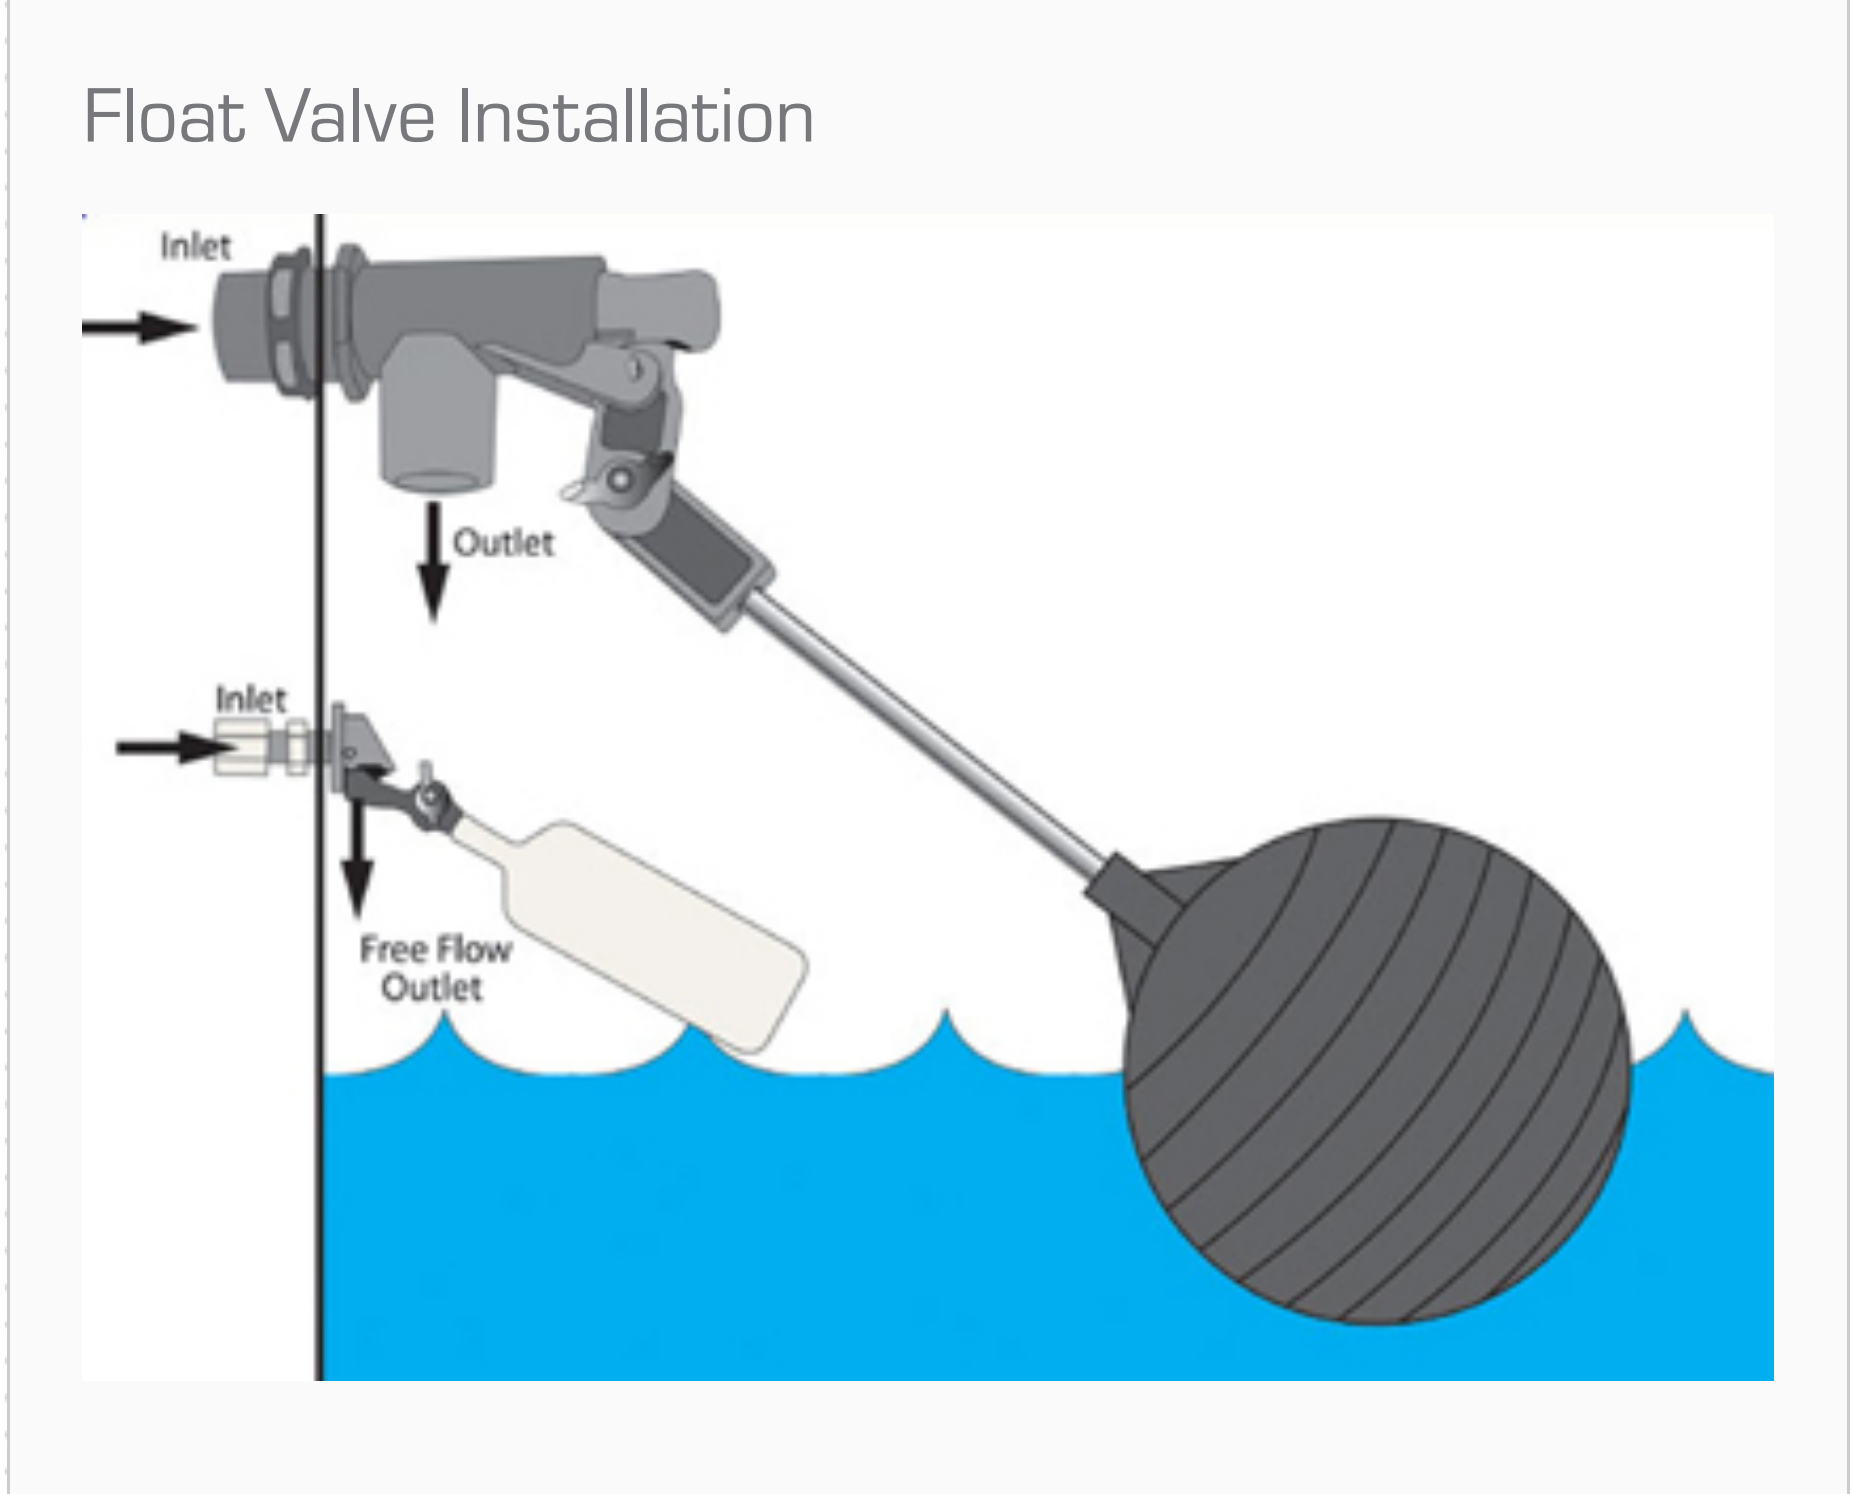

[Back](#)

News

[Control Devices, LLC Acquires Advanced Fuel Components, Inc.](#)

[Control Devices, LLC Acquires Harrison Valve](#)

[View All News »](#)

Events

[WEFTEC 2018](#)

Oct 1, 2018 - Oct 3, 2018

[World Dairy Expo](#)

Oct 2, 2018 - Oct 6, 2018

[View All Events »](#)

Control Devices, LLC
1555 Larkin Williams Road
Fenton, MIssouri 63026

Main: +1 636.660.7100
Toll-Free: +1 800.233.1477